

**SERIES SQUASHNI**



**Ceiling-mounting  
electronic  
sounder**

- Ceiling-mount
- Ultra-slim profile
- Second tone for two-stage alarms
- Fixing platform for detector bases
- For 12 and 24 V systems
- Ultra low current consumption

The Squashni Electronic sounder is the original innovative ceiling sounder with a universal fire detector mounting platform. The ultra-slim profile provides an unobtrusive sounder installation when combined with a smoke or heat detector. A blank cover can also be supplied to enable the Squashni to be used as a normal, stand alone wall or ceiling mounted sounder.

These sounders can be supplied both at 12 V and 24V DC. Simplified mounting thanks to double connecting terminals. Version 4800 has 28 user-selectable tones and a high IP protection degree.

Version 4820 (Squashni Micro) allows very low current consumption thanks to specific volume control set at low level. 4 available tones.

**GENERAL SPECIFICATIONS**

Housing material	Thermoplastic, red or white color
Connection type	6 terminals
Operating temperature	-25°C to +70°C
Packaging	1 pcs./package

**ORDER CODES**


Code	Rated voltage	Rated current	Allowed voltage	Acoustic output @ 1 m	N° of tones	Color	IP degree	Package weight	Notes
4800	12-24V DC	10 mA* @ 12V DC 18 mA* @ 24V DC	10÷28V DC	87 dB @ 12V DC 93 dB @ 24V DC	28	White	IP 54	0,15 kg	
4820 R	12-24V DC	5,5**mA @ 12V DC 15 mA @ 24V DC	9÷30V DC	90 dB @ 12V DC 97 dB @ 24V DC	4	Red	IP 42	0,16 kg	Squashni Micro
4820 W	12-24V DC	5,5**mA @ 12V DC 15 mA @ 24V DC	9÷30V DC	90 dB @ 12V DC 97 dB @ 24V DC	4	White	IP 42	0,16 kg	Squashni Micro

For tone references, see Sounder Tones Table

\* Rated current and sound pressure depend on the selected tone (indicated values correspond to tone N° 3)

\*\* With volume control set at low level

4800

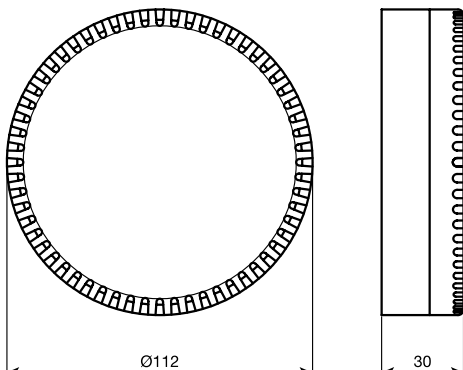

4820 R, 4820 W

