

SERIES 1469 1470




Metallic break glass call point

- Die-cast aluminium case
- IP 65 and IP 40 protections
- 1 changeover contact
- 3/8 gas cable entrance hole
- Functional test with provided key

Metallic break glass call point with direct activation (by breaking the glass, alarm is automatically triggered). Thanks to its solid aluminium structure, this call point is particularly suitable for industrial applications. The glass, that can be broken by simply pushing it, is provided with a specific anti-injury film. Functional test device with provided key. For the button resetting, it is necessary to replace the glass. Version 1469 is provided with a tight seal that ensures the protection degree IP 65. Universal (U) version available with the symbols "press in the middle" and "house in flames".

GENERAL SPECIFICATIONS

Housing material	Die-cast aluminium, epoxy red painting
Operation	Direct activation
Connection type	3 terminals x 2.5 mm <sup>2</sup>
Cable entrance holes	1 for 3/8 gas
Operating temperature	-15°C to +55°C
Standard equipment	Test key, stainless steel external screws, cable entrance hole cap, self-adhesive writings
Packaging	1 pcs./package

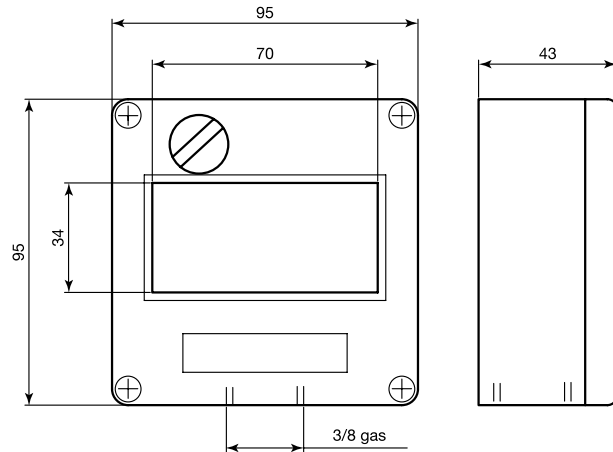

ORDER CODES

Code	Operation type	Contacts	Max contact current	Max contact voltage	Test	IP degree	Package weight	Notes
1469	Direct	1 changeover	3 A	75V DC	yes	IP 65	0,45 kg	With 7 writings in Italian*
1469 U	Direct	1 changeover	3 A	75V DC	yes	IP 65	0,45 kg	Universal
1470	Direct	1 changeover	3 A	75V DC	yes	IP 40	0,40 kg	With 7 writings in Italian*
1470 U	Direct	1 changeover	3 A	75V DC	yes	IP 40	0,40 kg	Universal

\* Provided writings: ALLARME INCENDIO, ALLARME, EMERGENZA, ARRESTO D'EMERGENZA, COMANDO ESTINZIONE AUTOMATICA, HALON, SCARICA HALON – on the glass, writing ROMPERE IL VETRO.

Buttons and/or glasses with writings in English, French, Spanish are available as accessories.

1470



1470 U



ACCESSORIES AVAILABLE (see accessories page)

Code	Description
1472	Spare glasses "ROMPERE IL VETRO". Dim. 40x79x1 mm
1472 U	Universal spare glasses. Dim. 40x79x1 mm
1470 SA	Rain-proof screen

MANUAL CALL POINTS